



1962 CHEVROLET IMPALA

1963-64 CHEVROLET IMPALA

6 Panel Sequential LED Taillight Kit Installation Guide

Kit Contents:


- **6** LED panels
- **1** deck lid harness
- **6** grommets
- **2** power wires
- **3** pigtail harness kits
- **3** crimp terminal kits

PN 1100962-6
1100963-6

Note

The LED boards are shipped with the slide switch set to sequential mode. We recommend that all slide switches be set to the same setting (either standard or sequential).

Please follow all local laws concerning exterior lighting.

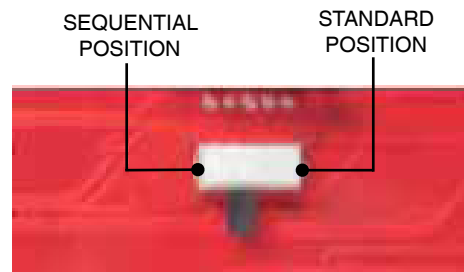

Shown in sequential mode

Hint

You may begin with the LED panel installation, however, you will need to complete the wiring modifications before the LED panels and housings are paired as one. Read over the entire instruction guide to determine the method that works best for you.

LED PANEL INSTALLATION

1. Cut off the power to your car.

Open the hood of your car. Disconnect the negative terminal from the battery, which will cut off the power in your car. To verify that the power is disconnected, press the brake pedal; your brake lights should not turn on.

2. Remove the current taillights.

Turn the light sockets counter-clockwise to remove them from the taillight housings. As a safety precaution, remove the bulbs from the sockets. Put them aside since they will no longer be needed. Remove the taillight housing assembly from the car.

3. Lay out the LED panels.

Lay out all six LED panels. To determine where they mount, each LED panel is labeled.

DL - Driver Left (in quarter panel)

DC - Driver Center (in trunk lid)

DR - Driver Right (in trunk lid)

PL - Passener Left (in trunk lid)

PC - Passenger Center (in trunk lid)


PR - Passenger Right (in quarter panel)



Passenger Left LED panel
shown above

4. Mount the LED panels.

Remove the lens and gasket. Test fit the LED panel with the wording facing up. The housing bolt studs will fit into the LED panel cut outs. Once you are satisfied, remove the adhesive tape paper and secure the panel into place.

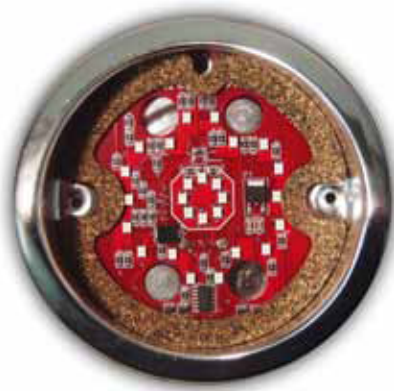

1962 housing and LED panel



1963-64 housing and LED panel

5. Install the body grommet.

Once the LED panel is secure plug in the extension harness. Then take a grommet and place them it around the wires and plug it into the housing socket hole.



WIRE SPLICING INSTALLATION



1. Review the wiring diagrams found on the last two pages.

All six LED panels need five connections.

- ORANGE - Constant 12 volt power source.
- BLACK - Grounded to body.
- YELLOW - Driver side turn signal.
- GREEN - Passenger side turn signal.
- BROWN - Running light signal.

2. Splice the LED panel wires into the original wires.

The quarter-panel LEDs get tapped into the main rear body harness. The kit includes a deck lid harness. Unplug the original deck lid harness

LED Panel	Original	Notes
 Dark Green	 Black-Pink	The light socket ends on the car harness can be discarded.
 Yellow	 Purple	The light socket ends on the car harness can be discarded.
 Brown	 Black	The ends going to the side marker lights must be included in the splice for the side markers to remain functional.

3 Replace the deck lid harness.

The kit includes a deck lid harness that needs to be used with the LED panel conversion. Unplug the original deck lid harness and remove it. The harness has a four pin plug that is located near the driver side deck lid hinge.

Note

A wire diagram of the LED panel spliced into the car's original harness is on the last page.

4. Splice the **Orange** power wire into the T-Tap and the LED panel **Orange** wire.

An **Orange** power wire is supplied along with a T-Tap. The orange power wire must be supplied with a constant 12 volt battery supply for the LED circuitry to operate properly. The T-Tap connector is used to splice to the constant power source, like the dome light wire.

Splice the T-Tap connector into the constant power wire, then plug the orange wire into the T-Tap. The other end of the orange wire is spliced into the LED panel Orange wires.



1. Insert wire onto T-Tap



2. Crimp with pliers



3. Plug connector into T-Tap

5. Tuck and secure the spliced wires.

Take the spliced sections and fold them over to one side and tape them in place. This will allow you to place the wiring into loom or wrap the LED panel wiring tightly away.



1. Fold wires to one side.



2. Secure with electrical tape.

